

**Specification**

Nominal Voltage	6V
Number of cell	3
Nominal Capacity	12Ah@20hr-rate (0.6A to 1.80V/cell @25°C)
Weight	Approx. 1.7Kg
Terminal	F1&F2
Container Material	ABS (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.
Rated Capacity	12Ah      20hr-rate (0.6A to 1.80V/cell @25°C)
	11.6Ah    10hr-rate (1.16A to 1.80V/cell @25°C)
	10.5Ah    5hr-rate (2.10A to 1.75V/cell @25°C)
	8.53Ah    1hr-rate 8.53A to 1.60V/cell @25°C)
Max. Discharge Current	180A(5sec)
Internal Resistance	Approx. 12mΩ(Fully charged)
Operating Temp. Range	Discharge: -20°C~50°C
	Charge    : -10°C~50°C
	Storage   : -20°C~40°C
Cycle Use	Charging Current: ≤3.6A
	Voltage: 7.3V~7.4V
	Temperature compensation: -30mV/°C
Standby Use	Charging Current: No limit
	Voltage: 6.8V~6.9V
	Temperature compensation: -20mV/°C
Self-Discharge	less than 3% at 25°C
Design Life	6 years (floating charge)



**Introduction**


The MOTOMA standard series batteries designed with 6 years or more service life for general purpose, which designed with advanced technology, super heavy duty grid, high performance plates and electrolyte. The standard series batteries have long and reliable standby life and high consistency for better performance in series usage.

**Applications**

- ◆ Auto control system & ATM machine
- ◆ Electronic apparatus and equipment
- ◆ Emergency light & Emergency backup power supply & Alarm/Security system
- ◆ Power generation system (solar and wind power system, etc.)
- ◆ Communication power & DC power
- ◆ Electric Power System (EPS)
- ◆ Uninterruptable Power System (UPS)
- ◆ .....

**Dimensions**

Length	151±1mm (5.94 inches)
Width	50±1mm (1.97 inches)
Height	94±1mm (3.70 inches)
Total Height	100±1mm (3.94 inches)

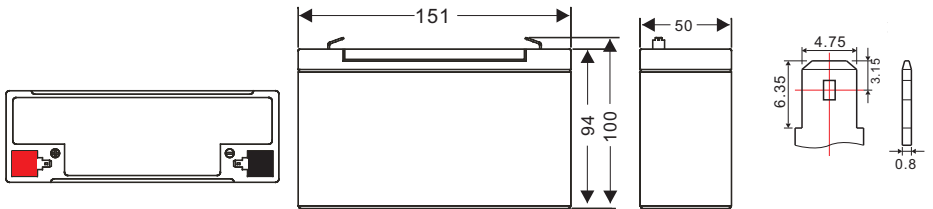

F1 Unit: mm


**Constant Current Discharge Characteristics: A (25°C)**

F. V/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V/cell	48.59	32.47	24.97	14.43	8.536	4.449	3.149	2.583	2.141	1.420	1.230	0.690
1.65V/cell	46.83	31.21	24.17	14.21	8.487	4.417	3.137	2.571	2.128	1.415	1.217	0.665
1.70V/cell	44.30	30.24	23.61	14.10	8.426	4.407	3.124	2.558	2.116	1.409	1.204	0.652
1.75V/cell	40.02	28.30	22.38	13.78	8.303	4.353	3.112	2.546	2.103	1.403	1.192	0.627
1.80V/cell	35.74	26.37	21.14	13.44	8.180	4.278	3.087	2.534	2.090	1.398	1.167	0.602
1.85V/cell	31.50	24.43	19.91	13.11	8.069	4.214	3.063	2.522	2.078	1.392	1.154	0.590


**Constant Power Discharge Characteristics: W (25°C)**

F. V/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V/cell	265.7	172.7	140.3	86.57	51.18	26.66	18.86	15.42	15.09	8.538	7.267	4.062
1.65V/cell	258.8	172.5	138.3	85.17	51.03	26.50	18.82	15.39	14.97	8.469	7.193	3.913
1.70V/cell	253.6	167.3	135.1	84.61	50.92	26.44	18.78	15.39	14.94	8.458	7.118	3.839
1.75V/cell	229.2	160.4	128.1	82.58	50.07	26.02	18.67	15.28	14.90	8.435	7.044	3.690
1.80V/cell	204.7	150.1	121.0	80.63	49.22	25.67	18.52	15.17	14.86	8.400	6.932	3.578
1.85V/cell	180.3	139.7	114.0	78.67	48.38	25.28	18.38	15.06	14.82	8.400	6.820	3.466


**Discharge Characteristics Curve**

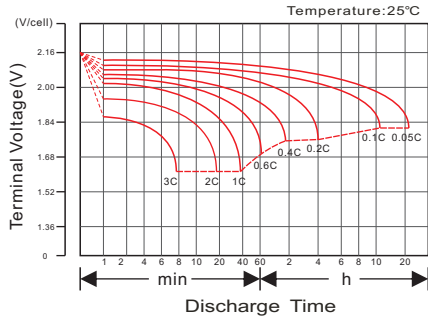


**Charging Characteristics Curve**

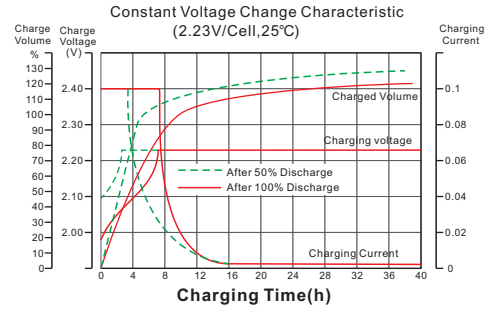


**Cycle life in relation to depth of Discharge**

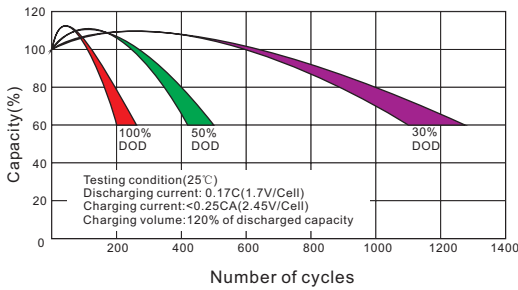


**Temperature effects on Capacity**

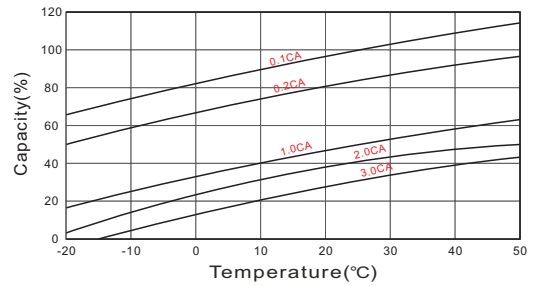


**Relationship between charging voltage and temperature**

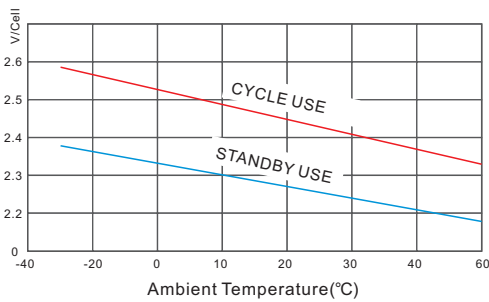

**Self-discharge Characteristics**

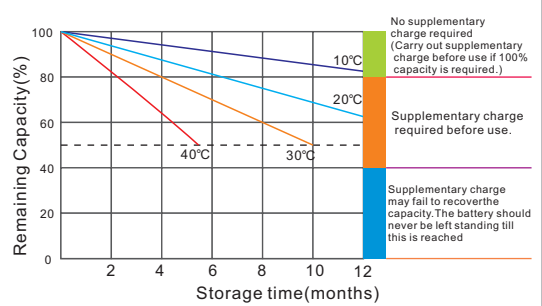

**Temperature effects on Float life**

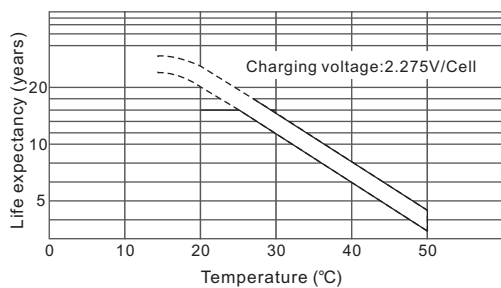

**Life Characteristics of Standby use**

