


Specification

Type	Lithium Thionyl Chloride Cell	
Nominal Voltage	3.6V	
Nominal Capacity	2400mAh(When 1mA discharged to 2.0V at 20°C/68°F)	
Open Circuit Voltage	3.63-3.66V	
Closed - circuit voltage	$\geq 3.2V$	
Nominal Dimension	Diameter:14.5mm Height:50.5mm	
Applications	Recommended discharge current 1to3mA	
Max.constant current	100mA	
Max.Pulse current	200mA	
Weigh(Aprox.)	19g	
Workadle temperature	-55°C ~ 85°C (-67°F ~ 185°F)	
Leakage proof	Deformations should not exceed by 0.2mm over the maximum dimensions and no leakage shall take place	
Test condition	temperature	$25 \pm 3^\circ C$
	humidity	$65 \pm 10\% RH$
	over discharge time	48hrs




Discharge Characteristics at $23 \pm 2^\circ C$

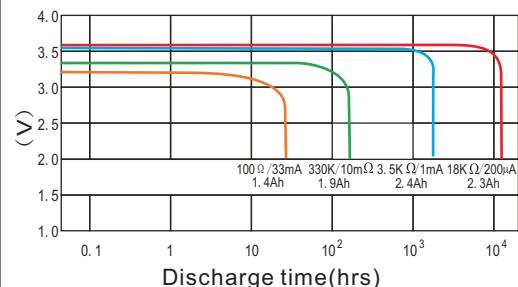


Dimensions (mm)



Voltage vs Temperature

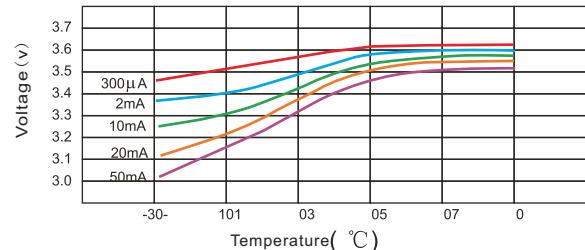

The relationship between capacity and current

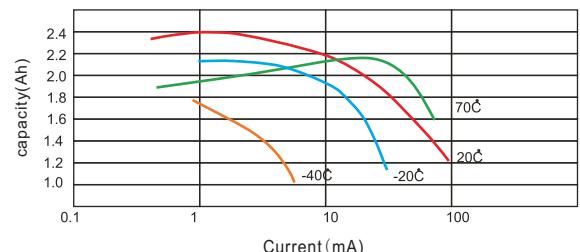

Precautions:

- 1.Never charge the battery or it may cause leakage and damage to device.
- 2.Insert battery with properly terminals on the equipment.
- 3.Never short circuit, incinerate, heat, or disassemble the battery.

※The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty.

Storage discharge characteristic

